

$\frac{3}{8}$ " UNF Hex Bolts – AS2465 Grade 5 Zinc Plated

Bolt Shear Capacity 'Thread' [BSC] = 27kN
 Bolt Pattern Shear Capacity [BPSC] = 4,458 Nm
 Bolt Pattern Design Torque [BPDT] = 1,114 Nm

$$BDPT = \frac{1}{4} \times BPSC$$


IFC-4300-95 Coupling Ratings:

Pleasure craft = 850 Nm


Intermediate = 750 Nm

Continuous = 500 Nm

IFC-4300-95 Coupling Weight = 0.7 kg

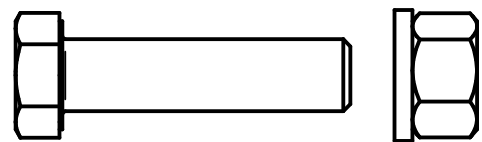


Item 2: $\frac{3}{8}$ " UNF x $1 \frac{1}{2}$ " Hex Bolt, Nut and Spring Washer

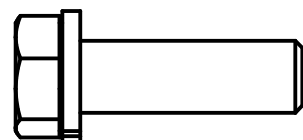

Item 3: $\frac{3}{8}$ " UNF x $1 \frac{1}{4}$ " Hex Bolt and Spring Washer

IFC-4300-95



Copyright © 2020 Isoflex Technologies Pty Ltd				
TITLE		IFC4300-95 General Arrangement		
	NAME	DATE		
DRAWN	Matthew McCart	02/Nov/20		
CHECKED	-	-		
APPR	-	-		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		SIZE	DWG NO	REV
		A3	IFC4300-95	B1
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE				
SCALE: 1:1		WEIGHT:		SHEET 1 OF 1

